#### ЭКОЛОГИЯ ECOLOGY

# Weili Duan,

Chinese Academy of Sciences, Deputy Director for Science, Xinjiang Institute of Ecology and Geography, Professor

# GLOBAL ENERGY USE AND CARBON EMISSIONS FROM IRRIGATED AGRICULTURE

### Вейли Дуань,

Китайская академия наук, заместитель директора по науке Синьцзянского института экологии и географии, профессор

# ГЛОБАЛЬНОЕ ИСПОЛЬЗОВАНИЕ ЭНЕРГИИ И ВЫБРОСЫ УГЛЕРОДА ОТ ОРОШИВАЕМОГО ЗЕМЛЕДЕЛИЯ

## Вейли Дуан,

Кытай илимдер академиясы, Синьцзян экология жана География институтунун илим боюнча директорунун орун басары, профессор

# ГЛОБАЛДЫК ЭНЕРГИЯНЫ КОЛДОНУУ ЖАНА СУГАТ ДЫЙКАНЧЫЛЫКТАН ЧЫККАН КӨМҮРТЕК

Irrigation is a land management practice with major environmental impacts. However, global energy consumption and carbon emissions resulting from irrigation remain unknown. We assess the worldwide energy consumption and carbon emissions associated with irrigation, while also measuring the potential energy and carbon reductions achievable through the adoption of efficient and low-carbon irrigation practices. Currently, irrigation contributes 216 million metric tons of CO<sub>2</sub> emissions and consumes 1896 petajoules of energy annually, representing

15% of greenhouse gas emissions and energy utilized in agricultural operations. Despite only 40% of irrigated agriculture relies on groundwater sources, groundwater pumping accounts for 89% of the total energy consumption in irrigation. Projections indicate that future expansion of irrigation could lead to a 28% increase in energy usage. Embracing highly efficient, low-carbon irrigation methods has the potential to cut energy consumption in half and reduce CO<sub>2</sub> emissions by 90%. However, considering country-specific feasibility of mitigation options, global CO, emissions may only see a 55% reduction. Our research offers comprehensive insights into the energy consumption and carbon emissions associated with irrigation, contributing valuable information that can guide assessments of the viability of irrigation in enhancing adaptive capacity within the agricultural sector.

Seventy percent of worldwide water withdrawals and 80-90% of water consumption are attributed to irrigated agriculture<sup>1</sup>. Irrigation plays a pivotal role in ensuring global food security, contributing to 40% of global food production while utilizing only 22% of the planet's cultivated areas2,3. As the challenges of global warming and population growth intensify, exacerbating concerns about water and food security, irrigation emerges as a crucial adaptive measure to address future food crises and the impacts of climate change4. Presently, irrigation relies on fossil fuel-based energy for pumping, resulting in the emission of greenhouse gases (GHGs)5-7. Numerous studies have quantified GHG emissions within agriculture and food systems8, covering aspects like land use9, the production and utilization of synthetic nitrogen fertilizers10,11 enteric fermentation from livestock production12, and the entire spectrum of food production, transportation, and consumption13,14. Previous studies have provided global and regional datasets detailing GHG emissions related to agriculture15,16. Additionally, prior research has assessed indirect GHG emissions linked to irrigation17, such as methane emissions from reservoirs, ditches, and channels used for irrigation18,

methane and nitrous oxide emissions from rice fields<sup>19</sup>, and nitrous oxide emissions under different fertilizer nitrogen use efficiencies<sup>20</sup>.

Furthermore, earlier studies have estimated irrigation energy consumption and GHG emissions specifically from irrigation in China21, India22, the Mediterranean region23, Pakistan24, and the United States<sup>25</sup>. However, there is a notable gap in studies providing global coverage of energy-related GHG emissions stemming from irrigation. Consequently, the extent to which GHG emissions from irrigation contribute to overall agricultural GHG emissions, and its role in global climate mitigation efforts, remains largely unknown. A comprehensive, globally distributed analysis of energy consumption and GHG emissions inherent to irrigation and pumping systems is imperative for devising effective mitigation strategies toward achieving agriculture with netzero emissions8.

While endeavors to diminish GHG emissions have primarily centered around energy and industrial systems<sup>26,27</sup>, studies addressing GHG reductions in agriculture, which accounts for 12% of total GHG emissions (7.1 Gt CO<sub>2</sub> equivalent per year)<sup>8</sup>, have garnered comparatively little attention. Moreover, the emphasis has predominantly been on enhancing the efficiency of irrigation water<sup>28</sup> rather than actively reducing energy consumption and CO<sub>2</sub> emissions. Consequently, there is a pressing need for the sustainable development of irrigated agriculture, aiming to enhance food production with reduced reliance on water, energy, and GHG emissions<sup>29</sup>.

Here, we quantify global energy consumption and CO, emissions from irrigation spanning the years 2000-2010, addressing the current gap in understanding farm energy and CO, emissions. We undertake a spatially explicit analysis of energy and CO, emissions from both surface and groundwater pumping on a global scale, utilizing a resolution of 10 × 10 km. Our assessment involves quantifying energy use across different irrigation systems-surface, sprinkler, and drip irrigation-as well as pumping systems, encompassing electricity and diesel pumping. The results are then aggregated spatially to quantify country specific and global energy and CO, emissions associated with irrigation. Secondly, we explore the phenomenon where groundwater, when pumped, may become supersaturated in carbonate relative to atmospheric pressure, leading to degassing and direct CO, emissions in irrigated fields30. Consequently, we quantify CO, emissions originating from groundwater degassing and compare these emissions with those related to energy from pumping30. Third, our study delves into estimating future energy and CO, emissions resulting from sustainable irrigation expansion in a 2050 water-efficient and low-carbon scenario. This expansion is contingent on local water availability meeting irrigation water demand under global warming scenarios4. Fourth, we evaluate the efficacy of various mitigation interventions and assess their feasibility in achieving a reduction in CO, emissions within irrigation systems. Finally, we assess the energy and CO, intensity of irrigation, comparing it with other farm operations such as fertilizers and machinery. Results Energy and CO, emissions intensity of irrigation. The energy intensity and CO, emissions intensity associated with irrigation exhibit significant variations across countries and continents (Fig. 1a, c). Median values for energy intensity and CO2 emissions intensity per unit of irrigation area stand at 2655 MJ/ha and 259 kg CO<sub>3</sub>/ ha, respectively (Fig. 1a, c). Asia registers the highest energy intensity (8.0 GJ/ha) and CO, emissions intensity per hectare (1063 kg CO<sub>2</sub>/ha), trailed by Africa (6.7 GJ/ha, 678 kg CO<sub>2</sub>/ha), South America (6.2 GJ/ha, 506 kg CO<sub>2</sub>/ ha), North America (4.6 GJ/ha, 485 kg CO<sub>2</sub>/ha), Oceania (4.3 GJ/ha, 375 kg CO<sub>2</sub>/ha), and Europe (1.9 GJ/ha, 218 kg CO<sub>2</sub>/ha) (Fig. 1a, c).

Our analysis reveals that the average energy use and CO<sub>2</sub> emissions intensity of sprinkler irrigation is the highest (1.8 MJ/m³, 188.4 g CO<sub>2</sub>/m³), followed by drip irrigation (1.0 MJ/m³, 109.0 g CO<sub>2</sub>/m³), and surface irrigation (0.5 MJ/m³, 58.5 g CO<sub>2</sub>/m³) (Fig. 1b, d). Additionally, the energy use and CO<sub>2</sub> emissions intensity of diesel pumping (1.2 MJ/m³, 106.4 g CO<sub>2</sub>/m³) exceeds that of electric pumping (0.5 MJ/m³, 69.0 g CO<sub>2</sub>/m³) (Fig. 1b, d).

# Energy consumption and CO<sub>2</sub> emissions from irrigation in 2000-2010

Our examination of energy consumption and CO<sub>2</sub> emissions from irrigation between 2000 and 2010 reveals significant disparities among countries and continents (Fig. 2 and Supplementary Fig. 4). The global energy consumption attributed to irrigation is 1896 PJ, with Asia and North America accounting for 72% and 14%, respectively (Fig. 2a and Supplementary Fig. 4a). In Asia, India stands out the largest energy consumer with 535 PJ, followed by China (299 PJ), Pakistan (135 PJ), and Iran (121 PJ), constituting 39%, 22%, 10%, and 9% of Asia's total energy consumption from irrigation, respectively (Fig. 2a). In North America, the United States emerges as the foremost energy consumer with 205 PJ, trailed by Mexico with 50 PJ, accounting for

77% and 19% of North America's energy consumption from irrigation, respectively (Fig. 2a). Notably, five countries — India, China, the United States, Pakistan, and Iran — collectively contribute to 68% of the global energy consumption from irrigation (Fig. 2a).

The overall CO<sub>2</sub> emissions associated with irrigation stem from both embodied energy consumption and groundwater degassing – the removal of dissolved CO<sub>2</sub> from water through degasification (Fig. 2b and Supplementary Figs. 4b and 5a). Our estimation indicates that the global total CO<sub>2</sub> emissions from irrigation amount to 222 Mt CO<sub>2</sub> per year, with 216 Mt CO<sub>2</sub> originating from energy consumption (Fig. 2b) and 6 Mt CO<sub>2</sub> from groundwater degassing (Supplementary Fig. 5a). Asia and North America emerge as the primary contributors to CO<sub>2</sub> emissions, emitting 164 Mt CO<sub>2</sub> and 32 Mt CO<sub>2</sub>, respectively, collectively constituting 88% of global total CO<sub>2</sub> emissions

sions. In contrast, Europe, Africa, Oceania, and South America contribute a combined total of 26 Mt CO<sub>2</sub> in irrigation-related CO<sub>2</sub> emissions (Fig. 2b). Additionally, the top five countries with the highest CO<sub>2</sub> emissions from irrigation due to energy consumption are India, China, the United States, Iran, and Pakistan, emitting 70, 35, 24, 13, and 12 Mt CO<sub>2</sub> per year, respectively, accounting for 72% of global CO<sub>2</sub> emissions from energy consumption.

When considering  $\mathrm{CO}_2$  emissions from groundwater degassing, India and the United States stand out the major contributors, emitting 2.9 and 1.4 Mt  $\mathrm{CO}_2$ , respectively (Supplementary Fig. 5a). Notably, in major irrigation-intensive regions of the United States, India, Pakistan, Iran, and Saudi Arabia,  $\mathrm{CO}_2$  emissions from groundwater degassing account for more than 20% of total  $\mathrm{CO}_2$  emissions from irrigation (Supplementary Fig. 5b).

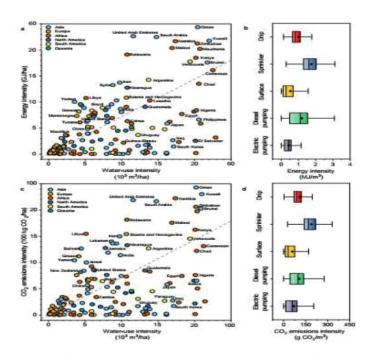


Fig. 1 | Energy and CO2 emissions intensity as a function of water-use intensity for 159 countries. The figure shows the comparison of energy and CO2 emissions intensity of different irrigation and pumping systems. a Energy intensity is expressed as the ratio of the energy consumed by irrigation to the irrigated area in a country (G/ha). b The energy intensity of each irrigation system (drip, sprinkler, and surface) or pumping system (diesel pumping and electric pumping) (M/m²) represents the energy consumption of five different irrigation and pumping system to pump and deliver one cubic meter of water. c CO<sub>2</sub> emissions intensity is

expressed as the ratio of the carbon dioxide emitted by irrigation to the irrigated area<sup>36</sup> in a country (100 kg CO<sub>2</sub>/ha). d The CO<sub>2</sub> emissions intensity of each irrigation system or pumping system is expressed in the same way as the energy intensity (g CO<sub>2</sub>/m<sup>3</sup>). Energy and CO<sub>2</sub> emissions intensity reflect the average level during the 2000–2010 period. Mean values in the boxplot are shown with diamonds and median values are shown with midlines. Dashed lines in the figure are used to distinguish countries that are above or below the median energy and CO<sub>2</sub> emissions intensity per unit of water use.

# Future energy consumption and CO<sub>2</sub> emissions

Sustainable irrigation is irrigation practices that do not deplete groundwater stocks and impair freshwater ecosystems31,32. As global warming and food demand increases, sustainable irrigation expansion is an important adaptation solution to future food crises and climate change3. The expansion of irrigation inevitably leads to energy consumption and energy-related CO<sup>2</sup> emissions. Therefore, we have also conducted an estimation of the energy and CO<sup>2</sup> emissions associated with future irrigation expansion. Our assumption is that irrigation will expand in regions where water is expected to be locally available to meet the demand for irrigation water in a climate that is 3°C warmer — a projected warming level under business-as-usual scenarios<sup>4</sup>. We presuppose that the existing country-specific efficiency of irrigation water usage, encompassing drip, sprinkler, and surface irrigation systems, remains constant in the envisioned scenario of sustainable irrigation expansion in the future. Our estimate indicates that the global additional energy consumption for future irrigation due to sustainable expansion would be 536 PJ, representing 28% of the total irrigation energy consumption in 2000-2010 (Fig. 2a and Supplementary Fig. 6a).

In North America, Africa, and South America, the energy consumption arising from sustainable irrigation expansion is projected to require an additional 139 PJ, 63 PJ, and 60 PJ, respectively, each exceeding 50% of their current energy consumption (Fig. 2a). Notably, Europe anticipates an additional energy consumption from sustainable irrigation expansion of 148 PJ, which is twice its current energy consumption (Fig. 2a). The United States, India, Russia, Brazil, and Mexico are identified as the top countries with the highest energy consumption from sustainable irrigation expansion, contributing 97 PJ, 49 PJ, 39 PJ, 39 PJ, and 18 PJ, respectively, collectively accounting for 45% of the total energy consumption from sustainable irrigation expansion (Fig. 2a).

Assuming the full adoption of electric pumps and the projected regional carbon intensity of electricity in 205033, the additional energy related  $\mathrm{CO_2}$  emissions resulting from sustainable irrigation expansion are estimated to be 15 Mt  $\mathrm{CO_2}$  per year, constituting 7% of the 2000- 2010 total energy-related  $\mathrm{CO_2}$  emissions (Fig. 2b and Supplementary Fig. 6b). India and Russia emerge as the most significant contributors to  $\mathrm{CO_2}$  emissions from sustainable irrigation expansion, emitting<sup>3</sup> and 2 Mt  $\mathrm{CO_2}$  per year, respectively.

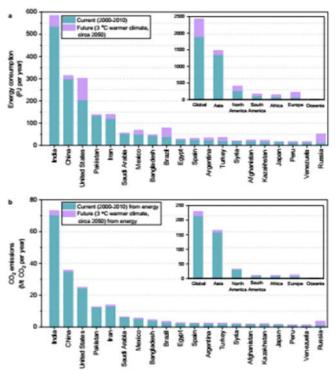


Fig. 2 | Global energy consumption and CO2 emissions from irrigation. Country level energy consumption and CO<sub>2</sub> emissions are based on pixel sum statistics. a Energy consumption (IF per year) under 2000–2000 and sustainable irrigation expansion in 3 °C warmer climate. b CO<sub>2</sub> emissions (Mt CO<sub>2</sub> per year) from energy consumption under 2000–2000 and sustainable irrigation expansion of 3 °C.

armer climate. We selected the top 20 countries with the highest energy conumption and CO<sub>2</sub> emissions. The upper right subgraphs represent a summary of nergy consumption and CO<sub>2</sub> emissions by regions as well as globally. Geospatial istribution maps are provided in Supplementary Figs. 4 and 6.

# Distribution of energy and CO<sup>2</sup> emissions

Figure 3 illustrates the global distribution flow of energy consumption and energy-related CO, emissions embedded in irrigation and pumping systems, along with irrigation water sources. Despite only 40% of irrigated agriculture being supplied by groundwater34, energy consumption from groundwater pumping constitutes 89% (1670 PJ per year) of total energy consumption (Fig. 3a). Within this, 74% (1234 PJ per year) of the energy consumption is attributed to diesel pumping, while electric pumping contributes to 26% (436 PJ per year) of the energy usage (Fig. 3a). Energy consumption from surface irrigation systems constitutes 75% (1400 PJ per year) of the overall energy consumption, with energy consumption from sprinkler and drip irrigation accounting for only 21% (388 PJ per year) and 4% (78 PJ per year), respectively. Notably, a significant portion of energy consumption arises from groundwater extraction using diesel pumps combined with surface irrigation system, contributing to 57% (1065 PJ per year) of the total energy consumption.

In terms of CO<sub>2</sub> emissions, 90% (193 Mt CO<sub>2</sub> per year) are attributed to groundwater pumping, with diesel pumping contributing 57% (110 Mt CO, per year) and electric pumping contributing 43% (83 Mt CO<sub>2</sub> per year) (Fig. 3b). CO<sub>2</sub> emissions from surface irrigation systems account for 76% (162 Mt CO<sub>2</sub> per year) of the total energy-related CO, emissions, with 59% (95 Mt CO, per year) contributed by diesel pumps and 41% (67 Mt CO<sub>2</sub> per year) by electric pumps. Conversely, CO, emissions from sprinkler and drip irrigation constitute only 20% (43 Mt CO2 per year) and 4% (8 Mt CO, per year), respectively. Additionally, CO2 emissions from groundwater extraction using diesel pumps combined with surface irrigation systems contribute to 45% of the total energy-related CO, emissions.

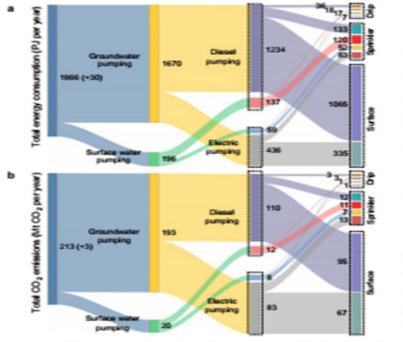


Fig. 3 | Sankey diagram of the distribution of energy consumption and energyrelated CO2 emissions from irrigation. a Energy consumption (PJ per year) during 2000–2010. b CO<sub>2</sub> emissions from embodied energy consumption (Mt CO<sub>2</sub> per year). In the figure, the total energy consumption and CO<sub>2</sub> emissions do not include those (values in parentheses) from natural gas pumping. Geospatial distribution maps are provided in Supplementary Figs. 7-13.

As the implementation of irrigation and pumping systems directly contributes to energy consumption and, consequently, energy-related CO<sub>2</sub> emissions, mitigation measures must address both the efficiency of irrigation equipment and the carbon intensity of energy. To explore viable options for reducing energy and

CO<sub>2</sub> emissions, we examine two main scenarios, namely enhancing irrigation systems to reduce water-use intensity and transitioning pumping systems to electric pumping while utilizing low-carbon electricity (see Methods).

Figure 4 shows global energy and CO<sub>2</sub> emissions under these distinct scenarios. In com-

parison to the 2000-2010 period, both energy consumption and energy-related CO, emissions from irrigation are cut in half under the drip irrigation scenario (Fig. 4). However, the sprinkler scenario results in an increase of 39% (743 PJ per year) in energy consumption and CO, emissions (Fig. 4a). Shifting all diesel pumping to electric pumping leads to a 51% (966 PJ per year) reduction in energy consumption (Fig. 4a). Furthermore, under the electric pumping scenario, where the electricity sources include 2000-2010 electricity mix, solar, wind, nuclear, hydropower, and projected electricity mix in 2050, the energy-related CO, emissions from irrigation are reduced to 175, 11, 3, 3, 6, and 6 Mt CO, per year, respectively (Fig. 4b). Notably, the potential for CO, emissions mitigation exceeds 90% under low-carbon electricity scenarios and is limited to 19% under the 2000-2010 electricity mix scenario (Fig. 4b).

# Feasibility of solutions to reduce energy use and CO, emissions

Through our examination of solutions aimed at reducing energy and CO, emissions, we demonstrate that both energy consumption and CO, emissions can be significantly diminished under drip and electric pumping scenarios. Notably, in the electric pumping scenario, a substantial reduction in CO, emissions is achievable only when electricity is low-carbon (Fig. 4). As a result, the proportion of low-carbon electricity in 2050 will play a pivotal role in determining the extent to which CO, emissions from irrigation can be reduced. The feasibility of adopting drip irrigation becomes a crucial factor in selecting strategies for energy and CO2 emissions reduction. For instance, given that drip irrigation is not applicable to rice cultivation, and not all countries will adopt low-carbon electricity by 205035, significant reductions in CO2 emissions may not be attainable. Consequently, this section focuses on analyzing the feasibility of solutions aiming at reducing CO, emissions.

Figure 5 shows the feasibility of drip irrigation and low-carbon electricity, as well as the potential contribution to reducing energyrelated CO<sub>2</sub> emissions for each country. The feasibility of low-carbon electricity is greater than drip irrigation. The Middle East and North Africa and Western Europe have higher feasibility of drip irrigation, with 40% and 29%, respectively (Fig. 5a). The Middle East and North Africa, Southeast Asia and Oceania, Western Europe, Sub-Saharan Africa, East Asia, and Latin America and the Caribbean have higher feasibility of low-carbon electricity, both exceeding 30% (Fig. 5a).

The feasibility of low-carbon electricity, that is, how much the share of low-carbon electricity can increase by 2050 compared with 2000-2010, determines how much CO, emissions can be reduced by 2050. Figure 5b shows that 55% of global energy-related CO, emissions are reduced through a combination of low-carbon electricity and drip, with 82% of the reduction being contributed by low-carbon electricity and 18% by drip irrigation. Middle East and North Africa, Northern America, and Western Europe can achieve over 60% reduction in energy-related CO, emissions, with drip irrigation contributing 30% of the reduction in the Middle East and North Africa (Fig. 5b). In South Asian and East Asia with intensive irrigation, over 50% of energy related CO, emissions are reduced through a combination of low carbon electricity and drip (Fig. 5b). However, in Eastern Europe and Central Asia, only 15% of energy-related CO, emissions are reduced through a combination of low-carbon electricity and drip (Fig. 5b).

# Irrigation contribution to on farm energy use

Based on the analysis of energy intensity and CO, emissions intensity of irrigation at the national scale (Fig.1 a,c), we further analyze irrigation contribution to farm energy use. Figure 6 shows the comparison of energy input and carbon emissions intensity of irrigation with total energy input and carbon emissions intensity on farm in sub-regions worldwide. Globally, energy input intensity of irrigation accounts for 32% of global energy input intensity, and over 50% in the sub-Saharan Africa, Middle East and North Africa, South Asia, and Latin America and the Caribbean (Fig. 6a). Accordingly, CO, emissions intensity of irrigation accounts for 33% of global CO, emissions intensity, and over 50% in sub-Saharan Africa, Middle East and North Africa, and South Asia (Fig. 6b). In addition, the largest energy input intensity and CO, emission intensity of North America also come from irrigation.

Based on the cropland area from FAOSTAT<sup>15</sup>, we estimate global energy consumption (PJ) and the corresponding carbon emissions (Mt CO<sub>2</sub>e) from fertilizers, machinery, and fuel (Supplementary Table 8). We find that energy consumption and carbon emissions from irrigation account for approximately 15% of the total energy consumption and carbon emissions in agriculture (Supplementary Table 8).

# Discussion

Since the Green Revolution of the 1960s, global crop production has increased by 3.7 times<sup>15</sup> due to the intensification, mechanization,

and modernization of agricultural systems<sup>36</sup>. However, gains in yield have come at a considerable cost in terms of increased energy input and considerable environmental footprint<sup>37,38</sup>. Irrigation development, as the concentrated embodiment of agricultural intensification, involved high energy consumption, led to reliance on fossil fuel, and CO<sub>2</sub> emissions (Fig. 2). In ad-

dition, energy input and carbon emissions from irrigation contribute significantly to total energy consumption and carbon emissions in agriculture (Fig. 6 and Supplementary Table 8).

High energy input and carbon footprint of irrigation in turn would potentially threaten the growth and stability of food production worldwide, especially in regions heavily dependent on fossil fuels<sup>37</sup>.




Fig. 4 Midigation potentials of energy use and CO2 emissions under different scenarios. a The sprinkler scenario and drip scenario have different water-use internities. For the electric pumping scenario, the energy comuniption of irrigation does not change with the CO<sub>2</sub> intensity of electricity. b in sprinkler and drip scenarios, CO<sub>2</sub> intensity of energy (electricity during 2000–2010) remains unchanged, in electric pumping scenarios, electricity comes from 2000–2010 electricity mix, solar wide, nuclear. Instrument or a mix of the four low-carbon electricity

scootding to IIA net-zero by 2010 projections<sup>25</sup>. The baseline scenario reflects mengy consumption and energy-related CO<sub>2</sub> emissions during 2000–2010. The 8000–2010 electricity mils represents the electricity production structure in 2000-0000, where the electricity comes from fossif fachs, nuclear, hydro, geothermul, olar, wind, tide, save, ocur an arb bioluchs<sup>36</sup>. Geospatial distribution maps are stooded in Supplementary Figs. 34-36.

Furthermore, the high energy input of irrigation also increases the pressure on the energy supply system and competition for energy from other sectors. In Pakistan and Bangladesh, the energy consumption of irrigation alone accounts for 4% of the total energy supply in 2000-2010 (Supplementary Fig. 19a). With future sustainable irrigation expansion (Fig. 2), the additional energy consumption of irrigation will add pressure on the energy supply in African and European countries (Supplementary Fig. 19b).

We provide solutions for achieving low energy consumption and carbon emissions as well as highly efficient water use in irrigated agriculture (Figs. 4 and 5). Drip and sprinkler represent two water efficient irrigation systems. Still, our results show that sprinkler irrigation system has higher energy and CO, emissions intensity than surface irrigation and does not reduce energy use and CO, emissions of irrigation globally (Figs. 1b, d and 4). Therefore, priority should be given to drip irrigation system in the deployment of farm infrastructure. The exception is when switching from gravity irrigation to drip irrigation increases energy consumption and CO, emissions of irrigation, where there is a trade-off between water savings and reductions of energy and  ${\rm CO}_2$  emissions<sup>39</sup>, as exemplified by Sudan

and Ethiopia (Supplementary Figs. 4 and 14). In this case, a benefit-cost analysis should be incorporated into the trade-off. If carbon emissions are also considered as an investment cost, then the cost increase induced by the adoption of drip irrigation systems includes the initial capital investment of equipment with benefits throughout the life cycle, usually 15-25 years, the converted cost of energy input, and carbon taxes38. The economic returns from investments in drip irrigation technology include improvement in production, a shift in cropping rotation, and water and fertilizer savings38,40. If the benefits are greater than the costs, the investment in drip irrigation systems can be treated as economically viable in countries like Sudan and Ethiopia. The benefit-cost analysis also applies to other countries around the world.

Remarkably, drip irrigation is not applicable to all crops (Supplementary Table 6), and its contribution to reducing global  $\mathrm{CO}_2$  emissions of irrigation is limited (Figs. 4b and 5b). Another solution in our study is to switch from energy-intensive diesel to efficient electric pumping (Fig. 1b) and use low-carbon electricity. Low-carbon electric pumps have a significant effect on reducing  $\mathrm{CO}_2$  emissions of irrigation (Figs. 4b and 5b), and have the same efficacy as drip irrigation in

reducing energy consumption of irrigation (Fig. 4a). Low-carbon electricity brings substantial long-term benefits to the country, such as reducing reliance on fossil fuels<sup>41</sup>. However, from farmer's perspective, the reduction of  $\mathrm{CO}_2$  emissions is not a priority. An introduced carbon price may facilitate the adoption of low-carbon electricity, but it may also erode the relative profitability of irrigated crop production<sup>40,42</sup>. Therefore, efforts should be put into the development of low-carbon electricity and cost reduction for countries

worldwide in the future. On the other hand, global energy consumption and  ${\rm CO_2}$  emissions from irrigation are dominated by groundwater pumping (Fig. 3). In this case, it is recommended to give priority to the use of surface water and shallow groundwater for irrigation. Meanwhile, the management of groundwater resources should be strengthened to prevent the decline in groundwater levels from offsetting the energy efficiency gains from the adoption of drip irrigation systems<sup>43,44</sup>.




Fig. 5 | Feasibility of solutions to reduce CO2 emissions of irrigation on a country-level scale. a Feasibility (X) of drip and low-carbon electricity. b Potential contribution (X) of drip and low-carbon electricity to energy-related CO2 emissions reduction based on the feasibility analysis. The pie chart shows the contribution ratio of low-carbon electricity and drip to representant CO2 emissions reduction.

The values at the bottom of the pie chart represent the total contribution due to a combination of the two solutions. For a more detailed comparison of regional differences, we further divided the six continents into nine sub-regions. (See Source Duta for the rationale of the classification). Country-level feasibility of drip and lowcustons described in Superiorism See 18 CSC 2006.1864.

Currently, spatially explicit estimates of global irrigation water withdrawals for irrigation are still before 201045, which prevents our study from providing the most time-sensitive analysis of global energy consumption and CO, emissions of irrigation. However, previous studies have shown that irrigation water withdrawal is driven by irrigated area46. Thus, we still can provide an updated understanding of global energy consumption and CO2 emissions of irrigation after 2010, assuming all other conditions except irrigated areas remain as in 2000-2010. Based on energy and CO, emissions intensity per unit of irrigated area (Fig. 1 a, c) and country-specific irrigated area derived from FAO AQUASTAT<sup>47</sup> in 2020, global energy consumption and CO, emissions of irrigation increased by about 14% in 2020 compared to 2000–2010, with significant increases in some African countries (Supplementary Fig. 23).

Our study sheds light on the previously un-

charted territory of global energy consumption and carbon emissions associated with irrigation. This research not only provides a comprehensive understanding of global direct energy use and associated CO, emissions from irrigation but also charts a path forward aiming for less water, energy, and CO, emissions in irrigated agriculture. Furthermore, previous work showed biophysical limits to irrigation showing where water is locally available to meet crop water demand<sup>3</sup>. However, irrigation is not only influenced by water availability but also socioeconomic factors, a phenomenon known as agricultural economic water scarcity<sup>48</sup>. Mapping at high resolution the energy and carbon emissions from irrigation allows us to understand where energy will be a barrier to irrigation. Our study provides detailed information on energy usage from irrigation and can inform on the feasibility of irrigation to increase adaptive capacity in the agricultural sector.

#### Methods

# Energy consumption and energy-related CO<sub>2</sub> emissions estimates

Irrigation energy use is a function of the volume of irrigation water and of the total pressure head<sup>7</sup> crucially affected by irrigation systems (drip, sprinkler, and surface irrigation), pumping systems (diesel pumping and electric pumping), and irrigation water source (surface or groundwater) (Supplementary Table 1). Global groundwater table depth datasets are derived from Fan et al.49. The percentage of surface water and groundwater for irrigation is taken from Siebert et al.50. Country-level datasets on the proportion of drip, sprinkler, and surface irrigation are obtained from Jägermeyr et al.28. Irrigation water withdrawal datasets reconstructed based on the global hydrological model LPImL during 2000-2010 are derived from Huang et al.51, which are calibrated and validated by using reported data from FAO AQUASTAT<sup>47</sup> and USGS<sup>52</sup>. The groundwater table depth and irrigation water withdrawal datasets were resampled from 30 arc-second and 30 arc-minutes to a 5 arc-minutes resolution using the nearest neighbor method to spatially match the datasets on the proportion of irrigation water source.

We assume that typical operating pressures for surface, drip, and sprinkler irrigation are 0.41 bar<sup>53</sup> (this is set to 0 for surface water sources), 1 bar and 3 bar<sup>23</sup>, respectively. The op-

erating friction losses of the piped distribution system are equal to 0.69 bar for all systems derived from Brown et al.<sup>54</sup>. Specifically, the energy requirement can be calculated using Eqs. (1) and (2):

$$EQ = \frac{V \times TH}{367 \times n}$$

$$TH = Lift + D + H + f_{losses}$$

where EQ (kW h) is energy requirement; V ( $m^3$ ) is irrigation water volume; TH (m) is the total water pressure head calculated as the sum of the lift from the water table to the ground surface, drawdown depth (D, both from cone of depression and additional drawdown from well efficiency), operating pressure (H) and friction losses of pipe (flosses);  $\eta$  represent the efficiency of the pump and prime mover (%).

The prime mover efficiency depends on energy source (mainly diesel and electricity). The lift parameter is represented by groundwater table depth. Due to the lack of global country-level information on the proportion of irrigation pumps (diesel and electric), we estimated the ratio of electric to diesel pumps by indirectly estimating grid coverage in irrigated areas at the pixel scale. According to the best statistical data, county-scale irrigation pump information (diesel, electricity, and natural gas pumps) was used separately for the United States (Supple-

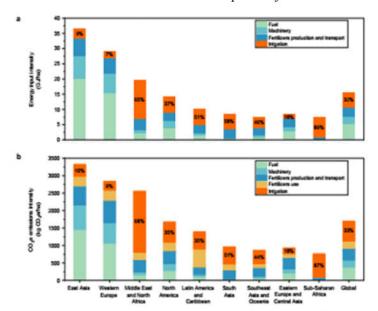


Fig. 6 | Contribution of irrigation energy input intensity to total energy input intensity and comparison of CO2 emissions intensity generated by energy inputs intensity during 2000-2010. a Energy inputs intensity comes from irrigation, fertilizers (N, P<sub>2</sub>O<sub>5</sub>, and K<sub>2</sub>O) production and transport, machinery (includes tractors, harvesters, and threshers\*) manufacturing, and fuel consumption of machines. b Besides GHG emissions generated by the four energy inputs, soil

emissions from N fertilizers use are considered. The useful life of machinery is assumed to be a 20-year average. The fuel used in the machinery mainly considers liquefied petroleum gas, motor gasoline, and gas-diesel oils. Other greenhouse gas emissions (e.g. CH<sub>4</sub> and N<sub>2</sub>O) generated by energy inputs are converted to carbon dioxide equivalents (CO<sub>2</sub>e), using global warming potential (CWP) values of the IPCC ARS with no climate feedback (CWP-CH<sub>4</sub> = 28; CWP-N<sub>2</sub>O = 265)<sup>ab</sup>.

90 Известия HAH KP, 2025, №2

mentary Methods Section 1.4). Estimations of drawdown depth, the efficiency of the pump and prime mover, and proportionality for irrigation pumps are described in detail in Supplementary Methods Section 1.1, 1.2, and 1.3.

The energy-related CO<sub>2</sub> emission of irrigation can be calculated as the energy requirement of irrigation multiplied by the carbon emission factor. The energy-related CO<sub>2</sub> emission from irrigation can be calculated using Eq.(3):

$$C_e = E_c \times C_{ef}$$
(3)

where Ce (g CO<sub>2</sub>) is CO<sub>2</sub> emissions; Ec (kWh) is energy consumption; C<sub>ef</sub> (g CO<sub>2</sub>/kWh) is CO<sub>2</sub> emission factor of energy consumption. The national-scale carbon intensity of electricity datasets during 2000–2010 are derived from IEA<sup>55</sup> and Our World in Data<sup>56</sup>, which depends on the source of electricity. Because the carbon emission intensity of electricity is influenced by the electricity trade, we considered the influence of the electricity trade (Supplementary Method Section 1.5). CO<sub>2</sub> emissions from diesel to produce 1 kWh of energy are equivalent to 320.21g CO<sub>2</sub> <sup>57.</sup> Supplementary Discussion Section 2.1 provides an analysis of the precision of our results.

# CO, emissions from groundwater degassing

Groundwater water is generally supersaturated in  $\mathrm{CO}_2$  compared to the overlying atmosphere, and this water-air gradient leads to  $\mathrm{CO}_2$  degassing when groundwater is pumped to the surface. Groundwater degassing is a source of  $\mathrm{CO}_2$  emissions from irrigation<sup>30</sup>. However,  $\mathrm{CO}_2$  emissions from groundwater degassing caused by irrigation were unquantified. The  $\mathrm{CO}_2$  emissions from groundwater degassing caused by irrigation

$$C_{GD} = V_{GD} \times R_{JWW} \times C_{GW}$$
(4)

where C<sub>GD</sub> is CO<sub>2</sub> emissions from ground-water degassing caused by irrigation; VGD is groundwater volume due to irrigation (m³); R<sub>IWW</sub> is the ratio of groundwater withdrawal for irrigated to total groundwater withdrawal; C<sub>GW</sub> is CO<sub>2</sub> concentration in groundwater. We used global average annual groundwater pumping datasets during 2000–2009 with a resolution of 0.5° derived from Döll et al.<sup>58</sup>. The datasets are based on the WaterGAP 2.2 model combined with local well observation or GRACE satellite observation, which can largely reduce uncertainty inherent in flux-based method<sup>59</sup>. Groundwater is mainly

used for irrigation, domestic and manufacturing, and the proportion of groundwater use in the domestic and manufacturing sectors suggested by Döll et al.<sup>58</sup> is 36% and 26%, respectively. Reconstructed sectoral water withdrawals datasets were obtained from Huang et al.<sup>51</sup>. A survey of water quality for groundwater aquifer of the United States shows that the 25% and 75% quantiles of bicarbonate concentration are 95 mg/L and 293 mg/L, respectively<sup>60</sup>. We assume that the global bicarbonate concentration of groundwater is likely like that measured in the United States. This is subsequently converted to CO<sub>2</sub> concentration according to Eq. (5):

$$CO_2Concentration = \frac{1}{2}HCO_3^- \times \frac{44}{61}$$
 (5)

Finally, the CO<sub>2</sub> concentration of groundwater ranges from 34.26 mg/L to 105.67 mg/L.

# Energy and CO, emissions intensity

Based on the estimation of energy and CO, emissions, we compared the differences in energy use intensity (GJ/ha) and CO2 emissions intensity (kg CO2/ha) between countries. Using geospatial information from irrigation systems and pumping systems, we compared spatially explicit differences in energy and CO, emissions per unit of water use between different irrigation and pumping systems. The energy consumption for irrigation comes directly from the pumping and delivery of water, with diesel and electricity consumption and indirect emissions of carbon dioxide. However, the energy and CO, emissions intensity of the same irrigation and pumping system is different due to the difference in irrigation water source (surface water and groundwater) and groundwater table depth. Furthermore, differences in operating pressure and pumping efficiency (Supplementary Methods Section 1.2) make the average energy and CO2 emissions intensity different between irrigation systems and pumping systems.

# Setting scenarios for mitigation options

To test the impact of mitigation options, the 2000–2010 condition is defined as a baseline. Furthermore, we selected two main options for reducing energy and  ${\rm CO_2}$  emissions and established multiple scenarios under each option.

The first scenario is to upgrade the agricultural irrigation systems. Different irrigation systems reflect different irrigation efficiency, implying different water-saving efficiency. Globally, drip irrigation will save 43% and 68% of irrigation water withdrawal compared with sprinkler and surface irrigation, respectively, whereas sprinklers will save 44% of irrigation water

withdrawal compared to surface irrigation as proposed by Jägermeyr et al. Supplementary Table 4). Therefore, based on the current irrigation system, two more efficient irrigation scenarios are represented by upgrading surface irrigation to sprinklers and to drip irrigation. We defined the first scenario as a sprinkler scenario and the second scenario as a drip scenario (Supplementary Table 5). Furthermore, we tested the effects of drip and sprinkler irrigation efficiency on energy consumption and  $\mathrm{CO}_2$  emissions by changing water-saving efficiency by 5% (Supplementary Method Section 1.10 and Supplementary Table 7).

The other option is to reduce CO<sub>2</sub> emissions by low-carbon electricity, which comes from solar, wind, nuclear, hydropower, and a mix of the four low-carbon electricity sources by 2050. However, the abstraction and application of irrigation water do not depend solely on electric pumping; diesel pumping also accounts for a considerable proportion in irrigated agriculture (Supplementary Table 3). Therefore, we converted all diesel pumping to electric pumping (electric pumping scenario). The carbon footprint of solar, wind, nuclear, and hydropower based on lifecycle assessment is 44, 11, 12, and 23 g CO<sub>2</sub>/ kWh, respectively<sup>61,62</sup>. The carbon footprint (25 g CO<sub>2</sub>/kWh) of electricity mix is estimated based on the carbon footprint as well as electricity generation by 2050 of these four powers (Supplementary Method Section 1.6). Likewise, we evaluated the uncertainty of carbon footprint for solar, wind, nuclear, and hydropower on mitigation potential (Supplementary Method Section 1.10 and Supplementary Table 7).

### Feasibility of mitigation options

Based on the scenario setting for reducing energy and CO<sub>2</sub> emissions, we further analyzed the feasibility of mitigation options. First, we evaluated the feasibility of drip irrigation and low-carbon electricity, as well as the potential contribution of drip and low-carbon electricity. The feasibility and potential contribution of drip irrigation and low-carbon electricity can be calculated using Eqs. (6) – (9):

$$F_{Drip} = \frac{IWC_{Drip}}{IWC_{Total}} - Drip_{Cur}$$
(6)

$$F_{Low} = Low_{2050} - Drip_{Cur}$$
 (7)

$$C_{Drip} = \frac{F_{Drip}}{1 - Drip_{first}} \times C_{DripS}$$
(8)

$$C_{low} = \frac{F_{low}}{1 - Low_{Cur}} \times C_{low5}$$
 (9)

where  $F_{\text{Drip}}$  is the feasibility of drip irrigation;  $\text{IWC}_{\text{Drip}}$  is the irrigation water consumption of crops that can adopt drip irrigation (Supplementary Table 6); IWC<sub>Total</sub> is the total irrigation water consumption for 26 crops; Drip<sub>Cur</sub> is the current ratio of drip. In this study, the irrigation water consumption of 26 crops from 2000–2010 is calculated based on the WATNEEDS model<sup>63</sup> (Supplementary Method Section 1.7). The  $F_{Low}$  is the feasibility of low-carbon electricity; Low<sub>2050</sub> is the share of low-carbon electricity by 2050<sup>33</sup>; Low is the share of low-carbon electricity during 2000–2010.  $C_{Drip}$  represents the potential contribution of drip;  $C_{DripS}$  represents the contribution of CO<sub>2</sub> emissions reduction under the drip scenario.  $\tilde{C}_{\text{\tiny Low}}$  represents the potential contribution of low-carbon electricity; C<sub>LowS</sub> represents the average contribution under the electric pumping scenario where electricity comes from wind, solar, nuclear, and hydropower. We used regional (Europe, Asia, Africa, Middle-East, North America, Latin America, Commonwealth of Independent States (CIS), and Pacific) low-carbon electricity targets for 2050, under which current NDC's (Nationally Determined Contributions) emission targets for 2030 can successfully achieve, as well as a continuation of consistent efforts post-2030.

For a combination of low-carbon electricity and drip irrigation, the contribution value of CO<sub>2</sub> emissions reduction can be calculated using Eq. (10):

$$1 - (1 - C_{Drip}) \times (1 - C_{Low})$$
 (10)

The feasibility of low-carbon electricity is set to 0, when the 2000-2010 national share of low-carbon electricity exceeds the projected regional targets by 2050 (Supplementary Discussion Section 2.3).

# Other energy inputs and CO<sub>2</sub> emissions

From the FAOSTAT database<sup>15</sup>, we obtained fertilizers (N, P<sub>2</sub>O<sub>5</sub>, and K<sub>2</sub>O) use (kg/ha) and cropland area data for each country during 2000–2010. Cropland areas were used to calculate inputs per hectare. We also obtained machinery (number of tractors, harvesters and threshers) data from the FAOSTAT database during 2000–2005<sup>15</sup>. Furthermore, we converted the physical quantities to energy units (GJ/ha) by using time-varying energy conversion factors, which can be found in Pellegrini et al.<sup>36</sup>. For machinery, we assumed an average lifespan of 20 years with an energy conversion factor of 8.35 GJ/t based on Pellegrini et al.<sup>36</sup>.

We further converted energy input intensity (GJ/ha) to CO<sub>2</sub> emissions intensity (kg CO<sub>2</sub>e/

ha) by using carbon emissions factors from the literature. For the production and transport of N,  $P_3O_5$ , and K<sub>3</sub>O fertilizers, we used the regional (Western Europe, Eastern Europe, Central and South America, Asia, Australia, New Zealand, and global average for the rest of the countries) emission factors (kg CO<sub>2</sub>e/kg)<sup>64</sup>. Furthermore, we used the regional (Africa, East Asia, Europe, Latin America, North America, Oceania, South Asia, CIS, and global average for the rest of the countries) emission factors for N fertilizers use (direct soil emissions)<sup>65</sup>. For machinery, we used an average emission factor of 95 kg CO2/GJ for the three machineries 66,67 (Supplementary Method Section 1.9). Due to the lack of information on the types and corresponding proportions of fuel consumed by machinery, we assumed that the fuel consumed by these three kinds of machinery is mainly derived from liquefied petroleum gas, motor gasoline, and gas diesel oils, which emit CO2, CH4, and N2O, and used average emission factor for the three fuels from the IPCC<sup>68</sup>. Then, we used the total cropland area from FAOSTAT15 to estimate total energy inputs and GHG emissions from fertilizers, machinery and fuel during 2000-2010. Due to the lack of reliable data for pesticides<sup>69</sup>, our analysis did not consider the energy input of pesticides.

#### Caveats

The proportion of surface water and groundwater plays a crucial role in accurately estimating global energy consumption and CO, emission for irrigation. In this study, the global average annual irrigation water withdrawals were 2588 km3 during 2000-2010, which agrees with the results (2673 km<sup>3</sup> in 2012) reported by FAO's AQUASTAT<sup>47</sup>. However, because the irrigation water sources proportion data provided by Siebert et al50, and irrigation water withdrawal data provided by Huang et al51. do not completely match spatially; only 2451 km3 of water are involved in the estimation of energy and CO, emissions. Therefore, the results in our study are a lower-bound estimate of CO, emissions from irrigation.

Due to the lack of country-level information on irrigation pumps, we used the proportion of the total irrigated area covered by the global grid network as the proportion of the electric pump, and the rest of the irrigated areas that are not connected to the grid used diesel pumps. Although our estimation results are relatively consistent with the results of previous literature surveys in eight countries (Supplementary Fig. 21 and Supplementary Table 3), there are still uncertainties.

When we calculated the mitigation potential of low-carbon electricity to CO, emissions, typical values of carbon footprints of solar, wind, nuclear, and hydropower were assumed. However, differences in technology levels between countries and wide ranges of carbon footprints for low-carbon electricity throughout the life cycle led to uncertainties in the mitigation potential of low-carbon electricity on CO2 emissions of irrigation (Supplementary Table 7). Considering the availability of data, we use regional or fixed conversion factors when estimating energy inputs and corresponding carbon emissions of other farm operations, such as emission factors for the use of liquefied petroleum gas, motor gasoline, and gas-diesel oils, which indirectly affects the proportion of irrigation energy input in the total energy input on farms.

In light of the ambitious renewable energy policies reported at COP28 (28th Conference of the Parties to the United Nations Framework Convention on Climate Change) aimed at achieving net-zero emissions targets by 205070, our findings may underestimate the potential for carbon emissions reduction from irrigation by 2050. Notably, major consumer of irrigation energy-India, China, Pakistan, and Iran-have not committed to tripling nuclear energy nor increasing renewable power generation capacity threefold by 2030. Consequently, while global carbon emissions from the energy sector are projected to significantly decrease by 2050, reducing carbon emissions from irrigation will necessitate these countries to make greater commitments towards renewable energy adoption. Furthermore, the renewable energy policies outlined at COP28 do not delineate the proportion of low-carbon electricity expected by 2050 for individual countries or continents, hindering precise estimations of the potential reduction in irrigation carbon emissions. Our study offers a framework for evaluating the potential reduction in irrigation-related carbon emissions, enabling updates to our findings as new data becomes available.

# Reporting summary

Further information on research design is available in the Nature Portfolio Reporting Summary linked to this article.

### Data availability

This work used data collected from a variety of literatures and publicly available sources, which are be listed in the main text and Supplementary material. All analyses are based on these collected datasets. Results from all analyses are available in Source data as Excel spread-

sheets alongside the paper. Data for the main results of this study are publicly available from https://doi.org/10.5281/zenodo. 10118986. Source data are provided with this paper.

### Code availability

The data were analyzed with the statistical software MATLAB and Origin. The script is publicly available from https://doi.org/10.6084/m9.figshare.25392874.v1

#### References:

- 1. Gleick, P. H., Cooley, H., Morikawa, M., Morrison, J. & Cohen, M. J. The world's water 2008-2009: The biennial report on freshwater resources. Available online at: https://islandpress.org/books/worlds-water-2008-2009#contents. Accessed 4th March 2023.
- 2. Portmann, F. T., Siebert, S. & Döll, P. MIRCA2000-Global monthly irrigated and rainfed crop areas around the year 2000: A new high-resolution data set for agricultural and hydrological modeling. Glob. Biogeochem. Cycle. 24, GB1011 (2010).
- 3. Rosa, L. Adapting agriculture to climate change via sustainable irrigation: Biophysical potentials and feedbacks. Environ. Res. Lett. 17, 063008 (2022).
- 4. *Rosa, L.* et al. Potential for sustainable irrigation expansion in a 3 C warmer climate. Proc. Natl. Acad. Sci 117, 29526-29534 (2020).
- 5. *Liu, Y. et al.* Global and regional evaluation of energy for water. Environ. Sci. Technol. 50, 9736 9745 (2016).
- 6. Rosa, L. et al. Energy implications of the 21st century agrarian transition. Nat. Commun. 12, 1-9 (2021).
- 7. Rothausen, S. G. & Conway, D. Greenhouse-gas emissions from energy use in the water sector. Nat. Clim. Chang. 1, 210-219 (2011).
- 8. Rosa, L. & Gabrielli, P. Achieving net-zero emissions in agriculture: a review. Environ. Res. Lett. 18, 63002 (2023).
- 9. Hong, C. et al. Global and regional drivers of land-use emissions in 1961-2017. Nature. 589, 554–561 (2021).
- 10. Tonelli, D., Rosa, L., Gabrielli, P., Parente, A. & Contino, F. Costcompetitive decentralized ammonia fertilizers production can increase food security. Nat. Food. In Press. https://www. Resear-chsquare.com/article/rs-3392837/v1 (2023).
- 11. Rosa, L. & Gabrielli, P. Energy and food security implications of transitioning synthetic nitrogen fertilizers to net-zero emissions. Environ. Res. Lett. 18, 14008 (2022).
- 12. Chang, J. et al. Revisiting enteric methane emissions from domestic ruminants and their  $\delta$ 13CCH4 source signature. Nat. Commun. 10, 1-14 (2019).
- 13. *Crippa, M. et al.* Food systems are responsible for a third of global anthropogenic GHG emissions. Nat. Food. 2, 198–209 (2021).
- 14. *Li, M. et al.* Global food-miles account for nearly 20% of total foodsystems emissions. Nat. Food. 3, 445-453 (2022).
- 15. Food and Agriculture Organization of the United Nations. FAOSTAT database. http://www.fao.org/faostat/en/ Accessed 4th March 2023. Article <a href="https://doi.org/10.1038/s41467-024-47383-5">https://doi.org/10.1038/s41467-024-47383-5</a> Nature Communications | (2024) 15:3084 10
- 16. United Nations Climate Change. National Greenhouse Gas Inventory Sub-missions. Available online at: https://unfccc.int/ghginven-tories-annex-i-parties/2023 Accessed 4th March 2023.
  - 17. Yang, Y. et al. Sustainable irrigation and climate feedbacks. Nat. Food. 4, 654–663 (2023).
- 18. Aguilera, E. et al. Methane emissions from artificial waterbodies dominate the carbon footprint of irrigation: a study of transitions in the food–energy–water–climate nexus (Spain, 1900-2014). Environ. Sci. Technol. 53, 5091-5101 (2019).
- 19. Adhya, T. K. et al. Wetting and drying: reducing greenhouse gas emissions and saving water from rice production. Working Paper, Installment 8 of Creating a Sustainable Food Future. (Washington, DC: World Resources Institute, 2015). Available online at https:// files.wri.org/d8/s3fs-public/wetting-drying-reducing-greenhousegas-emissions-saving-water-rice-production.pdf Accessed 4th March 2023.
- 20. Kuang, W., Gao, X., Tenuta, M. & Zeng, F. A global meta-analysis of nitrous oxide emission from drip-irrigated cropping system. Glob. Change Biol. 27, 3244-3256 (2021).

21. Zou, X. et al. Greenhouse gas emissions from agricultural irrigation in China. Mitig. Adapt. Strateg. Glob. Chang. 20, 295-315 (2015).

- 22. Rajan, A., Ghosh, K. & Shah, A. Carbon footprint of India's groundwater irrigation. Carbon Manag 11, 265–280 (2020).
- 23. Daccache, A., Ciurana, J. S., Rodriguez Diaz, J. A. & Knox, J. W. Water and energy footprint of irrigated agriculture in the Mediterranean region. Environ. Res. Lett. 9, 124014 (2014).
- 24. Siyal, A. W. & Gerbens-Leenes, P. W. The water–energy nexus in irrigated agriculture in South Asia: Critical hotspots of irrigation water use, related energy application, and greenhouse gas emissions for wheat, rice, sugarcane, and cotton in Pakistan. Front. Water. 4, 941722 (2022).
- 25. Driscoll, A. W., Conant, R. T., Marston, L. T., Choi, E. & Mueller, N. D. Greenhouse gas emissions from US irrigation pumping and implications for climate-smart irrigation policy. Nat. Commun. 15, 675 (2024).
- 26. *Gabrielli, P. et al.* Net-zero emissions chemical industry in a world of limited resources. One Earth 6, 682-704 (2023).
  - 27. Davis, S. J. et al. Net-zero emissions energy systems. Science 360, eaas 9793 (2018).
- 28. Jägermeyr, J. et al. Water savings potentials of irrigation systems: global simulation of processes and linkages. Hydrol. Earth Syst. Sci. 19, 3073–3091 (2015). 29. D'Odorico, P. et al. The Global Food-Energy-Water Nexus. Rev. Geophys. 56, 456-531 (2018).
- 30. Wood, W. W. & Hyndman, D. W. Groundwater Depletion: A Significant Unreported Source of Atmospheric Carbon Dioxide. Earth's Future 5, 1133-1135 (2017).
- 31. Rosa, L. et al. Closing the yield gap while ensuring water sustainability. Environ. Res. Lett. 13, 104002 (2018).
- 32. Rosa, L., Chiarelli, D. D., Tu, C., Rulli, M. C. & D'Odorico, P. Global unsustainable virtual water flows in agricultural trade. Environ. Res. Lett. 14, 114001 (2019).
- 33. Enerdata. Global energy & climate outlook 2050. https:// enerout-look.enerdata.net/fore-cast-world-co2-intensity-ofelectricity-generation.html Accessed 4th March 2023.
- 34. Siebert, S., Henrich, V., Frenken, K. & Burke, J. Update of the digital global map of irrigation areas to version 5. (Rheinische FriedrichWilhelms-Universität, Bonn, Germany and Food and Agriculture Organization of the United Nations, Rome, Italy, 2013).
- 35. International Energy Agency (IEA). Net zero by 2050: A roadmap for the global energy sector (2021). Available online at: https://www.iea.org/events/net-zero-by-2050-a-roadmap-for-the-global energy-system Accessed 6th August, 2022. 36. Pellegrini, P. & Fernández, R. J. Crop intensification, land use, and on-farm energy-use efficiency during the worldwide spread of the green revolution. Proc. Natl. Acad. Sci 115, 2335-2340 (2018).
- 37. Mushtaq, S., Maraseni, T. N., Maroulis, J. & Hafeez, M. Energy and water tradeoffs in enhancing food security: A selective international assessment. Energy Policy 37, 3635-3644 (2009).
- 38. Maraseni, T. N., Mushtaq, S. & Reardon-Smith, K. Climate change, water security and the need for integrated policy development: the case of on-farm infrastructure investment in the Australian irrigation sector. Environ. Res. Lett. 7, 34006-34012 (2012).
- 39. Mushtaq, S., Maraseni, T. N. & Reardon-Smith, K. Climate change and water security: Estimating the greenhouse gas costs of achieving water security through investments in modern irrigation technology. Agric. Syst. 117, 78-89 (2013).
- 40. *Maraseni, B. T. & Cockfield, G.* Including the costs of water and greenhouse gas emissions in a reassessment of the profitability of irrigation. Agric. Water Manage. 103, 25–32 (2012).
- 41. Bundschuh, J. et al. Geothermal, wind and solar energy applications in agriculture and aquaculture. (CRC Press, 2017).
- 42. Maraseni, T., An-Vo, D. A., Mushtaq, S. & Reardon-Smith, K. Carbon smart agriculture: An integrated regional approach offers significant potential to increase profit and resource use efficiency, and reduce emissions. J. Clean Prod. 282, 124555 (2020).
- 43. *McCarthy, B. et al.* Trends in Water Use, Energy Consumption, and Carbon Emissions from Irrigation: Role of Shifting Technologies and Energy Sources. Environ. Sci. Technol. 54, 15329–15337 (2020).
- 44. Smidt, S. J. et al. Complex water management in modern agriculture: Trends in the water-energy-food nexus over the High Plains Aquifer. Sci. Total Environ. 566, 988–1001 (2016).
- 45. McDermid, S., Nocco, M. & Lawston-Parker, P. Irrigation in the Earth system. Nat. Rev. Earth Environ. 4, 435–453 (2023).

- 46. Puy, A., Borgonovo, E., Piano, S. L. & Levin, S. Irrigated areas drive irrigation water withdrawals. Nat. Commun. 12, 4525 (2021).
- 47. Food and Agriculture Organization of the United Nations. AQUASTAT database https://data.apps.fao.org/aquastat Accessed 12th March 2023.
- 48. Rosa, L., Chiarelli, D. D., Rulli, M. C., Dell'Angelo, J. & D'Odorico, P. Global agricultural economic water scarcity. Sci. Adv. 6, eaaz6031 (2020).
- 49. Fan, Y., Li, H. & Miguez-Macho, G. Global patterns of groundwater table depth. Science. 339, 940–943 (2013).
- 50. Siebert, S. et al. Groundwater use for irrigation—a global inventory. Hydrol. Earth Syst. Sci. 14, 1863–1880 (2010).
- 51. *Huang, Z. et al.* Reconstruction of global gridded monthly sectoral water withdrawals for 1971–2010 and analysis of their spatiotemporal patterns. Hydrol. Earth Syst. Sci. 22, 2117–2133 (2018).
- 52. *Dieter, C. A. et al.* Estimated use of water in the United States in 2015: U.S. Geological Survey Circular 1441. https://pubs.usgs.gov/circ/1441/circ1441.pdf (2018). Accessed 10th June 2023.
- 53. *Hanson, B. & Putnam, D.* Flood irrigation of alfalfa: how does it behave. In: Proceedings 34th California Alfalfa & 2004 13–15 (National Alfalfa Symposium, San Diego, CA, 2023) Accessed 8th April 2023.
- 54. Brown, G. O. The history of the Darcy-Weisbach equation for pipe flow resistance. In Environmental and Water Resources History, 34–43 Available online at: <a href="https://doi.org/10.1061/40650">https://doi.org/10.1061/40650</a> (2003)4 Accessed 4th June 2023.
  - 55. IEA. CO, emissions from fuel combustion highlights. (International Energy Agency, 2012).
- 56. Ritchie, H. & Rosado, P. Electricity mix. Our World In Data. Available online at: https://our-worldindata.org/electricity-mix Accessed 25th May 2023.
- 57. Wang, J. et al. China's water energy nexus: greenhouse-gas emissions from groundwater use for agriculture. Environ. Res. Lett. 7, 14035 (2012).
- 58. Döll, P., Müller Schmied, H., Schuh, C., Portmann, F. T. & Eicker, A. Global-scale assessment of groundwater depletion and related groundwater abstractions: Combining hydrological modeling with Article https://doi.org/10.1038/s41467-024-47383-5 Nature Communications | (2024) 15:3084 11 information from well observations and GRACE satellites. Water Resour. Res. 50, 5698–5720 (2014).
- 59. *Wada, Y.* Modeling Groundwater Depletion at Regional and Global Scales: Present State and Future Prospects. Surv. Geophys. 37, 419–451 (2016).
- 60. *Desimone, L. A.* Quality of water from domestic wells in principal aquifers of the United States, 1991-2004. (U.S. Geological Survey, 2009).
- 61. UNECE. Carbon neutrality in the UNECE region: integrated life-cycle assessment of electricity source. (Geneva: United Nations, 2022).
- 62. *Ubierna, M., Santos, C. D. & Mercier-Blais, S.* Water Security and Climate Change: Hydropower Reservoir Greenhouse Gas Emissions. (Water Security Under Climate Change, 2022).
- 63. Chiarelli, D. D. et al. The green and blue crop water requirement WATNEEDS model and its global gridded outputs. Sci. Data. 7, 273 (2020).
- 64. FAO. Global Database of GHG Emissions Related to Feed Crops: Methodology. Version 1. Live-stock Environmental Assessment and Performance Partnership. (FAO, Rome, Italy, 2017).
- 65. *Menegat, S., Ledo, A. & Tirado, R.* Greenhouse gas emissions from global production and use of nitrogen synthetic fertilisers in agriculture. Sci Rep 12, 14490 (2022).
- 66. Saunders, C. M., Barber, A. & Taylor, G. J. Food miles-comparative energy/emissions performance of New Zealand's agriculture industry. (Lincoln Univ, Canterbury, New Zealand, 2006).
  - 67. Stout, B. A. Handbook of energy use for world agriculture. (Pergamon Press, 1990).
- 68. Eggleston, H., Buendia, L., Miwa, K., Ngara, T. & Tanabe, K. 2006 IPCC guidelines for national greenhouse gas inventories. (Institute for Global Environmental Strategies Hayama, Japan, 2006).
- 69. Audsley, E., Stacey, K., Parsons, D. J. & Williams, A. G. Estimation of the greenhouse gas emissions from agricultural pesticide manufacture and use. (Cranfield University Press, 2009).
- 70. UNFCCC. Summary of global climate action at COP28. (UNFCCC: Dubai, the United Arab Emirates, 2023).